


## Wireless Wall Touch Switch

Model: WL-SFB-C Series


User Manual

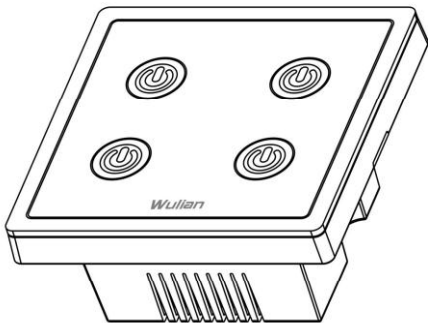

Picture is only for reference

## ***Copyright notation***

©  
***2012 Nanjing IOT Sensor Technology Co., Ltd All Rights Reserved.***

Wulian,  is the trademark and registered trade mark of *Nanjing IOT Sensor Technology Co., Ltd.* The other products mentioned in this article or company names may be the trademark or trade name of their respective owners.

Before installing and using the products, please read user manual carefully, which will help you use the products for better.

The pictures in the manual are just for your information. If some pictures have differences with material object, the material object is final.

The content in the manual is protected by copyright law legislator. It strictly prohibits any forms of copying, passing, distributing and storing any content of the manual without prior, written, consent of the instructor of *Nanjing IOT Sensor Technology Co., Ltd.*

When using, if the practical situation of the product is different with that in the manual, or if you want to get more information, or you have any questions or ideas, please contact us as below:

## Product introduction

Wireless Wall Touch Switch Series, based on ZigBee protocol, can achieve remote control to switch button via any smart mobile terminals, super convenient.

This series of products are also widely applied in smart building, smart hospital, smart hotel, and smart breeding etc except for smart home system.



(This brochure takes 4-way touch switch for example)

## **II**Function features

Support ZigBee HA protocol

ZigBee device type : Router

Compliant with ergonomic design


Fashionable yet refined appearance

Simple and flexible operation


Easy to install

Multiple colors available, perfectly paired with different home style

## **III**Function illustration

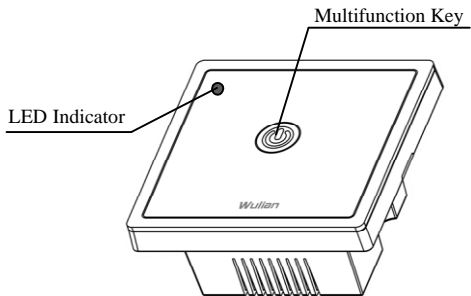


1-way

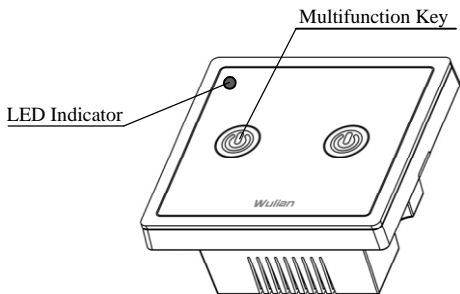


2-way

---

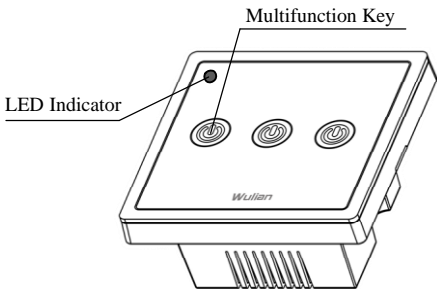

3-way

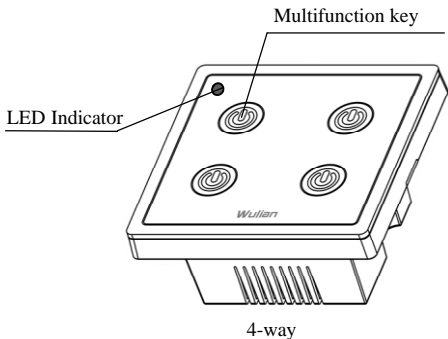

## Installation steps

1. Connect this product with the wire of the wall box;

	<b>1-way</b>	<b>2-way</b>	<b>3-way</b>	<b>4-way</b>
--	--------------	--------------	--------------	--------------

PE	Protect the earth			
A	1-way Load Output	1-way Load Output	1-way Load Output	1-way Load Output
B	/	2-way Load Output	2-way Load Output	2-way Load Output
C	/	/	3-way Load Output	3-way Load Output
D	/	/	/	4-way Load Output
N	Null Line Input			




L	Live Line Input
---	-----------------

**Note:** Please make sure that the power has been turned off before installation!

Dangerous, non-professionals are prohibited operating without authorization.

2. Fasten the base of this product inside the wall box with 2 screws, same installation method with the ordinary wall switch;
3. Shut down the decorative cover for the final installation. (as shown in the picture).

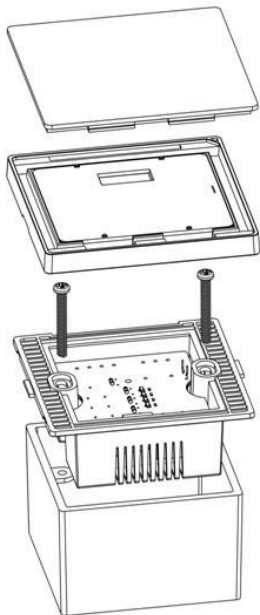

## Application methods


### 1. Networking Setup

- (1) It can be used as an ordinary wall switch, or used together with communication gateway;



- (2) Quickly click **【multi-function key】** 4 times to join ZigBee network. LED indicator flashes when it is searching the network;

The single click time

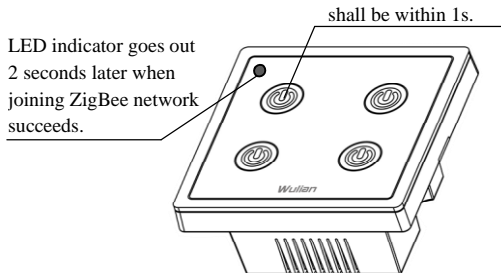


LED indicator goes out  
2 seconds later when  
joining ZigBee network  
succeeds.

shall be within 1s.

- (3) Quickly click each key 3 times in turn and send binding request of each way (this function is optional);

The single click time


If the binding succeeds, LED indicator flashes 3 times. If it fails, LED indicator flashes 6 times.



(4) Long press **【multi-function key】** for 10 seconds to restore to factory settings. Factory reset is not to join ZigBee network by

default. LED indicator goes out after flashing for 4 times.

LED indicator goes out after flashing 4 times



(Note : Operation steps of 1-way , 2-way , and 3-way same with 4-way switch)

## 2. Software Download

- (1) Choose the related software according to different smart mobile terminal:
  - a) Android users please search “wulian” in “Google Play Store”, selecting “Smart Home” for downloading;
  - b) iPhone users please come to “APP Store” to search “smart home”, selecting “smart home” for downloading;

- c) Pad users can directly log on our official website <http://www.wulian.cc> for downloading.
- (2) Install and operate according to the indication of each version of software;
- (3) Installation completed, enter setup and usage interface;
- (4) It also supports computer operation according to users' needs.

### **3、 How to use**

- (1) Users can control the switch with ease via mobile terminal device and choose any scene mode. Specific operational processes see various versions of instructions;
- (2) Users can take a common operation to it. The single-control touch switch controls 1-way load, double-control touch switch takes charge of 2-way load, 3-control switch dominates 3-way load, and 4-control one regulates 4-way load;
- (3) Local control: click **【Each Way Load】** key to switch the current load output and the LED indicator under the key shows an opposite status to the current output. LED indicator stays on

in case of load short circuit, and it goes out in case of load access.

## **V**Notes

### **Installation**

If you are new to using it, please read this product instruction carefully before installation.

### **Cleaning**

This product should be installed in a clean and dry place to avoid humidity or other material entering internal components which will influence its work. When the surface is stained with dust, dry it with soft cloth, cleaning fluid with corrosive composition and other chemical solvent are forbidden.

### **Storage**

Those products packed in boxes should be placed in the location which is dry, free of corrosive gas and available to air. The height



of pile should be no more than 10 layers. Store temperature should be between  $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$  with humidity  $\leq 75\%$ .

### **Transportation**

Those products packed in boxes can be transported with any kind of means, if the direct influence of rain, snow, and severe impact is avoided.

### **After-sale services**

Once broken, it should be send to the local maintenance station and only professional personnel can open it. Our customer service department is also available for help.

## **VI Product specification**

<b>Weight</b>	250g
<b>Net Weight</b>	200g

<b>Color</b>	Multiple pictures and colors available
--------------	--

## VIII Contents within the package

<b>Components</b>	<b>Quantity</b>
Wireless Wall Touch Switch	1
Decorative Cover	1
Instruction	1
Screw(s)	2

## IX Ordering information

<b>Product(s)</b>	<b>Art. No.</b>	<b>Model</b>
1-way	WLPN1206301	WL-SFB-C01
2-way	WLPN1206302	WL-SFB-C02
3-way	WLPN1206303	WL-SFB-C03
4-way	WLPN1206304	WL-SFB-C04

<b>Packing Size</b>	138×118×68mm
<b>Power Supply</b>	110V-230V

<b>Type of Workload</b>	Resistive Load: 600 W per way
	Inductive/ Capacitive load: 350 W per way