

# DH-DVR5204L/5208L/5216L

## 4/8/16 Channel Entry-level D1 1.5U Standalone DVR



### Features

- > Up to 4/8/16 cameras with 1080p realtime preview
- > H.264 dual-stream video compression
- > Full channel @D1(4CIF) realtime recording
- > HDMI / VGA / TV simultaneous video output
- > All channel synchronous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 2 SATA HDD up to 8TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

### Technical Specifications

Model	DH-DVR5204L	DH-DVR5208L	DH-DVR5216L
<b>System</b>			
Main Processor	Embedded processor		
Operating System	Embedded LINUX		
<b>Video</b>			
Input	4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
<b>Audio</b>			
Input	4 channel, RCA		
Output	1 channel, RCA		


# DH-DVR5204L/5208L/5216L

Two-way Talk	1 channel Input, 1 channel Output(reuse the audio output channel), BNC		
<b>Display</b>			
Interface	1 HDMI, 1 VGA, 1 TV, 1 Spot, BNC		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split	1/4	1/4/8/9	1/4/8/9/16
Privacy Masking	4 rectangular zones (each camera)		
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
<b>Recording</b>			
Video/Audio Compression	H.264 / G.711		
Image Resolution	D1/4CIF(704×576/704×480) / HD1(352×576/352×480) / 2CIF(704×288/704×240) / CIF(352×288/352×240) / QCIF(176×144/176×120)		
Record Rate	Main Stream:	D1/HD1/2CIF/CIF(1~25/30fps)	
	Extra Stream	CIF/QCIF(1~25/30fps)	
Bit Rate	48~4096Kb/s		
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop		
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
<b>Video Detection &amp; Alarm</b>			
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input	4 channel	8 channel	16 channel
Relay Output	3 channel		
<b>Playback &amp; Backup</b>			
Sync Playback	1/4	1/4/9	1/4/9/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device / Network		

# DH-DVR5204L/5208L/5216L

Network	
Ethernet	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, Alarm Server
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	2 SATA ports(2HDDs or 1HDD + 1CD/DVD-RW), up to 8TB
Auxiliary Interface	
USB Interface	2ports (1 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
Environmental	
Power Supply	DC12V/ 3.3A
Power Consumption	15W(without HDD)
Working Environment	-10 ~ +55°C / 10~90%RH / 86~106kpa
Dimension(W×D×H)	1.5U, 440mm×460mm×68mm
Weight	5.0KG(without HDD)

## System Connection

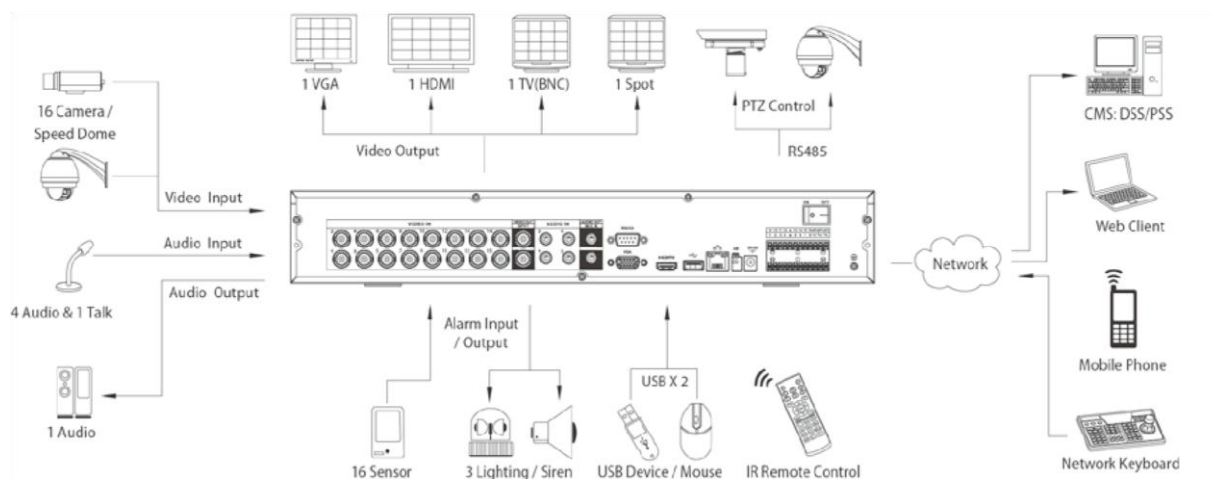

\* Take DVR5216L as an example

**Dahua Technology Co., Ltd.**

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883



## **DH-DVR5204L/5208L/5216L**

Fax: +86-571-87688815 Email:

[overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.